

GENERAL NOTES

200 AMP TYPE 120/240 1ø SERVICE CABINET

- 1. SEE STANDARD SPECIFICATION 9-29.24, SERVICE CABINETS.
- HINGES SHALL HAVE STAINLESS STEEL OR BRASS PINS.
- CABINETS SHALL BE RATED NEMA 3R AND SHALL INCLUDE TWO RAIN TIGHT VENTS.
- METERING EQUIPMENT DOOR SHALL BE PAD LOCKABLE. EACH DOOR SHALL BE GASKETED. INSTALL BEST CX CONSTRUCTION CORE ON RIGHT DOOR. SEE DOOR HINGE DETAIL SHEET 1 OF 2
- 5. THE FOLLOWING EQUIPMENT WITHIN THE SERVICE ENCLOSURE SHALL HAVE AN APPROPRIATELY ENGRAVED PHENOLIC NAME PLATE ATTACHED WITH SCREWS OR RIVETS: KEY NUMBERS 2, 3, 4, 6, 7, 8, 9 AND 16. **KEY NUMBER 4 NAME PLATE SHALL READ:** "PHOTOCELL BYPASS TEST ON" AND "PHOTOCELL TEST OFF- AUTOMATIC". SEE SERVICE CABINET DETAIL.
- METERING ARRANGEMENTS VARY WITH DIFFERENT SERVING UTILITIES. THE UTILITY MAY REQUIRE METER BASE MOUNTING IN THE ENCLOSURE. ON THE SIDE OR ON THE BACK OF THE ENCLOSURE. THE UTILITY MAY REQUIRE THE DIMENSION BETWEEN THE DOOR AND THE FRONT OF THE SAFETY SOCKET BOX TO BE LESS THAN THE 11 INCHES SHOWN IN THE LEFT SIDE- SAFETY SOCKET BOX MOUNTING DETAIL. THE CONTRACTOR SHALL VERIFY THE SERVING UTILITY'S REQUIREMENTS PRIOR TO FABRICATION OF AND INSTALLING THE SERVICE EQUIPMENT.
- 7. DIMENSIONS SHOWN ARE MINIMUM AND SHALL BE ADJUSTED TO ACCOMMODATE THE VARIOUS SIZES OF EQUIPMENT INSTALLED.
- ALL BUSSWORK SHALL BE HIGH GRADE COPPER AND SHALL EQUAL OR EXCEED THE MAIN BREAKER RATING. ALL BREAKERS SHALL BOLT ONTO THE BUSSWORK. JUMPERING OF BREAKERS SHALL NOT BE ALLOWED. BUSSWORK SHALL ACCOMMODATE ALL FUTURE **EQUIPMENT AS SHOWN IN THE BREAKER SCHEDULE**
- THE PHOTOCELL UNIT SHALL BE CENTERED IN THE PHOTOCELL ENCLOSURE TO PERMIT 360 DEGREE ROTATION OF THE PHOTOCELL WITHOUT REMOVAL OF THE PHOTOCELL UNIT OR THE PHOTOCELL ENCLOSURE.
- 10. ALL INTERNAL WIRE RUNS SHALL BE IDENTIFIED WITH "TO - FROM" CODED TAGS LABELED WITH THE CODE LETTERS AND/OR NUMBERS SHOWN ON THE SCHEDULES. APPROVED PVC OR POLYOLEFIN WIRE MARKING SLEEVES SHALL BE USED
- 11. ALL NUTS, BOLTS AND WASHERS USED FOR MOUNTING THE PHOTOCELL ENCLOSURE SHALL BE STAINLESS STEEL.
- 12. A 1% TOLERANCE IS ALLOWED FOR ALL DIMENSIONS.
- UNISTRUT TYPE CHANNEL AND MOUNTING HARDWARE COMPONENTS SHALL BE STAINLESS STEEL. CONDUIT CLAMPS SHALL BE HOT DIPPED, GALVANIZED STEEL OR STAINLESS STEEL.
- 14. INSTALL CONDUIT COUPLINGS ON ALL CONDUITS. PLACE COUPLINGS FLUSH WITH TOP OF CONCRETE FOUNDATION.
- 15. NOTE 15 HAS BEEN DELETED.
- THE METER BASE PORTION OF THIS SERVICE WAS DESIGNED TO MEET METERING PORTION OF EUSERC DRAWING 309 REQUIREMENTS.
- 17. WHEN USING ALTERNATE DOOR HINGE: REMOVE HINGE PIN PRIOR TO WELDING HINGE TO CABINET AND PRIOR TO HOT DIP GALVANIZING CABINET. AFTER GALVANIZING, REPLACE PIN WITH BRASS PIN AND SOLDER IN PLACE.
- 18. VERIFY THE SERVICE UTILITY STAND-OFF DIMENSION ADJUST THE REMOVABLE PANEL TO THE MEASUREMENT PROVIDED BY THE UTILITY COMPANY. AFTER ADJUSTMENT. CUT OFF ALL-THREAD BOLTS SO THAT NO LESS THAN 2 AND NO MORE THAN 3 FULL THREADS EXTEND PAST THE **FACE OF THE NUTS**

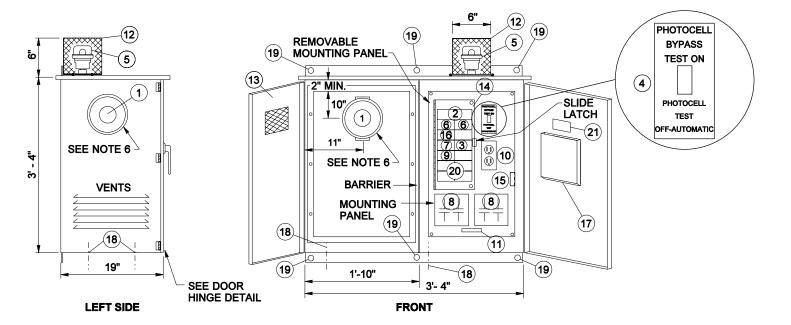

SERVICE CABINET DETAIL

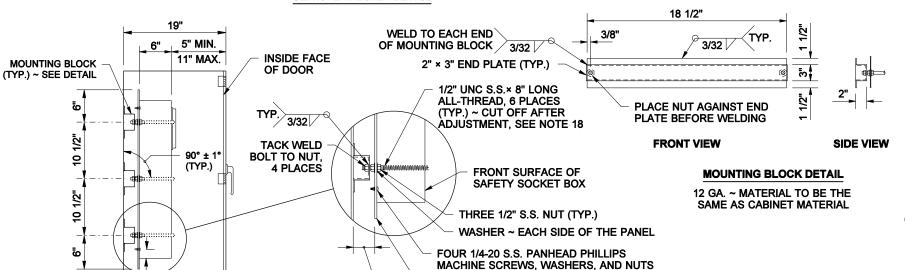

~ TOP AND BUTTOM, SPACED EVENLY

1/2" RETURN ~ WELD AT CORNERS

12 GA REMOVABLE PANEL

LEFT SIDE- SAFETY SOCKET BOX MOUNTING DETAIL


~ SEE NOTE 18

STAND-OFF DIMENSION

1 1/2" (TYP.)

LAP WELD

VIEW B-B

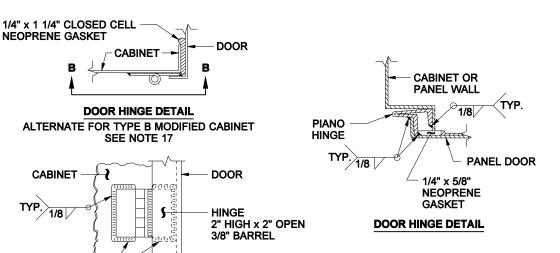

KEY

- METER BASE PER SERVING UTILITY REQUIREMENTS AS A MINIMUM, THE METER BASE SHALL BE SAFETY SOCKET **BOX WITH FACTORY INSTALLED TEST BYPASS FACILITY** THAT MEETS THE REQUIREMENTS OF EUSERC DRAWING 305.
- MAIN BREAKER (SEE BREAKER SCHEDULE)
- (3) PHOTOCELL BREAKER (SPST 15 AMP - 120/240 VOLT)
- TEST SWITCH (SPDT SNAP ACTION, POSITIVE CLOSE 15 AMP - 120/277 VOLT - "T" RATED)
- (5) PHOTOELECTRIC CONTROL, STD. SPEC. 9 - 29.11(2)
- **(6) BRANCH BREAKER (SEE BREAKER SCHEDULE)**
- SIGNAL BREAKER (SEE BREAKER SCHEDULE)
- (8) CONTACTOR (SEE BREAKER SCHEDULE)
- RECEPTACLE BREAKER (SPST 20 AMP 120/240 VOLT)
- RECEPTACLE, GROUNDED (GFCI 20 AMP 125 VOLT)
- (11) **NEUTRAL BUSS, 14 LUG COPPER**
- (12) PHOTOCELL ENCLOSURE - ENCLOSURE TO BE FABRICATED FROM 5/8" EXPANDED STEEL MESH WITH WELDED SEAMS AND MOUNTING FLANGES. HOT DIP GALVANIZED AFTER FABRICATION. TYPE 5052 - H32 ALUMINUM WITH 5/8" x 5/8" **OPENINGS EQUIVALENT TO 5/8" EXPANDED STEEL MESH** MAY BE USED AS ALTERNATIVE MATERIAL. SEE PHOTOCELL **ENCLOSURE MOUNTING DETAIL, SHEET 2 OF 2.**
- HINGED FRONT FACING DOOR WITH 4" x 4" MIN. POLISHED WIRE GLASS WINDOW.
- HINGED DEAD FRONT WITH 1/4 TURN FASTENERS OR SLIDE
- CABINET MAIN BONDING JUMPER. BUSS SHALL BE 4 LUG TINNED COPPER. SEE CABINET MAIN BONDING JUMPER DETAIL ON SHEET 2 OF 2.
- SPARE BRANCH BREAKER (DPST 20AMP- 120/240 VOLT)
- METAL WIRING DIAGRAM HOLDER

PHOTOCELL TEST

OFF - AUTOMATIC

- (18) 1/4" DIAMETER DRAIN HOLE. DRILL BEFORE GALVANIZING.
- MOUNTING HOLE. SEE SERVICE CABINET MOUNTING DETAILS
- 18 CIRCUIT PANEL BOARD MINIMUM SIZE WITH SEPARATE MAIN BREAKER.
- LABEL CABINET WITH BUSSWORK RATING.



SERVICE CABINET TYPE B MODIFIED (0 - 200 AMP TYPE 120/240 SINGLE PHASE) STANDARD PLAN J-3b

SHEET 1 OF 2 SHEETS

APPROVED FOR PUBLICATION

Harold J. Peterfeso 03-04-05



WIRING SCHEMATIC

(8)

(8)

(6)

PHOTOCELL BYPASS TEST ON

ILL CKT A

ILL CKT B

SIZE PER NEC.

MINIMUM SIZE #2

(°) (15)

120/240 VAC

(2)

7

(16)


(10)

(11)


SIGNAL CKT

SPARE CKT

IOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE REVISED SAFETY SOCKET BOX MOUNTING DETAIL THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST. DATE REVISION

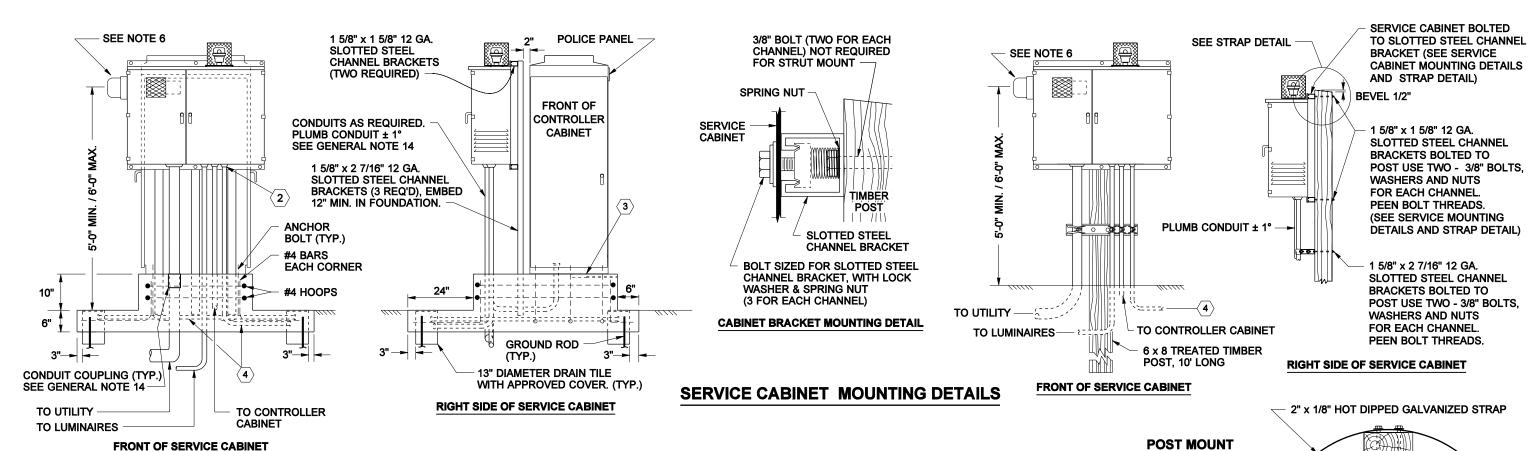

STRUT MOUNT

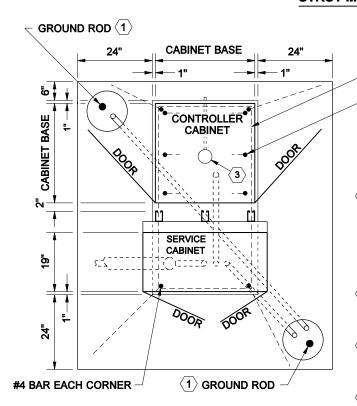

PLAN VIEW OF SERVICE CABINET

DRIVE GROUND RODS BEFORE PLACING CONCRETE. MOVE ROD(S) AND DRAIN TILE(S) WITH COVER(S) ÀS REQUIRED TO ACHIEVE FULL GROUND PENETRATION. MAINTAIN A 6' MINIMUM CLEARANCE **BETWEEN GROUND RODS AS DETAILED** ON STD. PLAN J-9a "TYPICAL GROUNDING

SEE STANDARD PLAN J-6c "CABINET FOUNDATION DETAILS".

FOR DETAILS NOT SHOWN.

TWO #4 HOOPS

DETAILS".

ANCHOR BOLT (TYP.)


ALL CONDUITS PENETRATING CABINET SHALL BE TERMINATED WITH GROUNDING END BUSHING AND BONDED TO THE CABINET GROUNDING BUS.

4" DIAM, x 1/2" DEEP SUMP, SLOPE FOUNDATION TOWARDS SUMP. 3/8" DIAM. POLYETHYLENE OR COPPER DRAIN PIPE. SLOPE TO DRAIN OUTSIDE FOUNDATION.

TO SERVICE GROUND - PER STD. PLAN J-9a TYPICAL GROUNDING DETAILS"

METAL WASHERS **PHOTOCELL** RUBBER WASHER (APPLY SILICONE **ENCLOSURE** SEALER TO BOTH SIDES OF RUBBER FLANGE WASHER PRIOR TO INSTALLATION) **SERVICE** CABINET 1/4" x 1" MACHINE BOLT

PHOTOCELL ENCLOSURE MOUNTING DETAIL

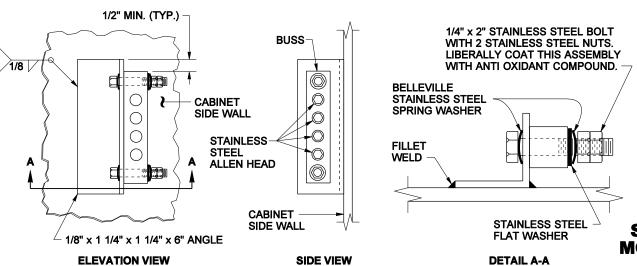

CABINET MAIN BONDING JUMPER DETAIL



3/8" ø x 1" BOLT, LOCK WASHER

AND NUT. (TYP.)

POST MOUNT STRAP DETAIL

SERVICE CABINET TYPE B MODIFIED (0 - 200 AMP TYPE 120/240 SINGLE PHASE) **STANDARD PLAN J-3b**

SHEET 2 OF 2 SHEETS

APPROVED FOR PUBLICATION

Harold J. Peterfeso

STATE DESIGN ENGINEER

03-04-05

IOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE

THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION, IS KEPT ON FILE AT THE WASHINGTON STATE DEPARTMENT OF TRANSPORTATION. A COPY MAY BE OBTAINED UPON REQUEST